

CMDB

Subtitle

2024/05/04

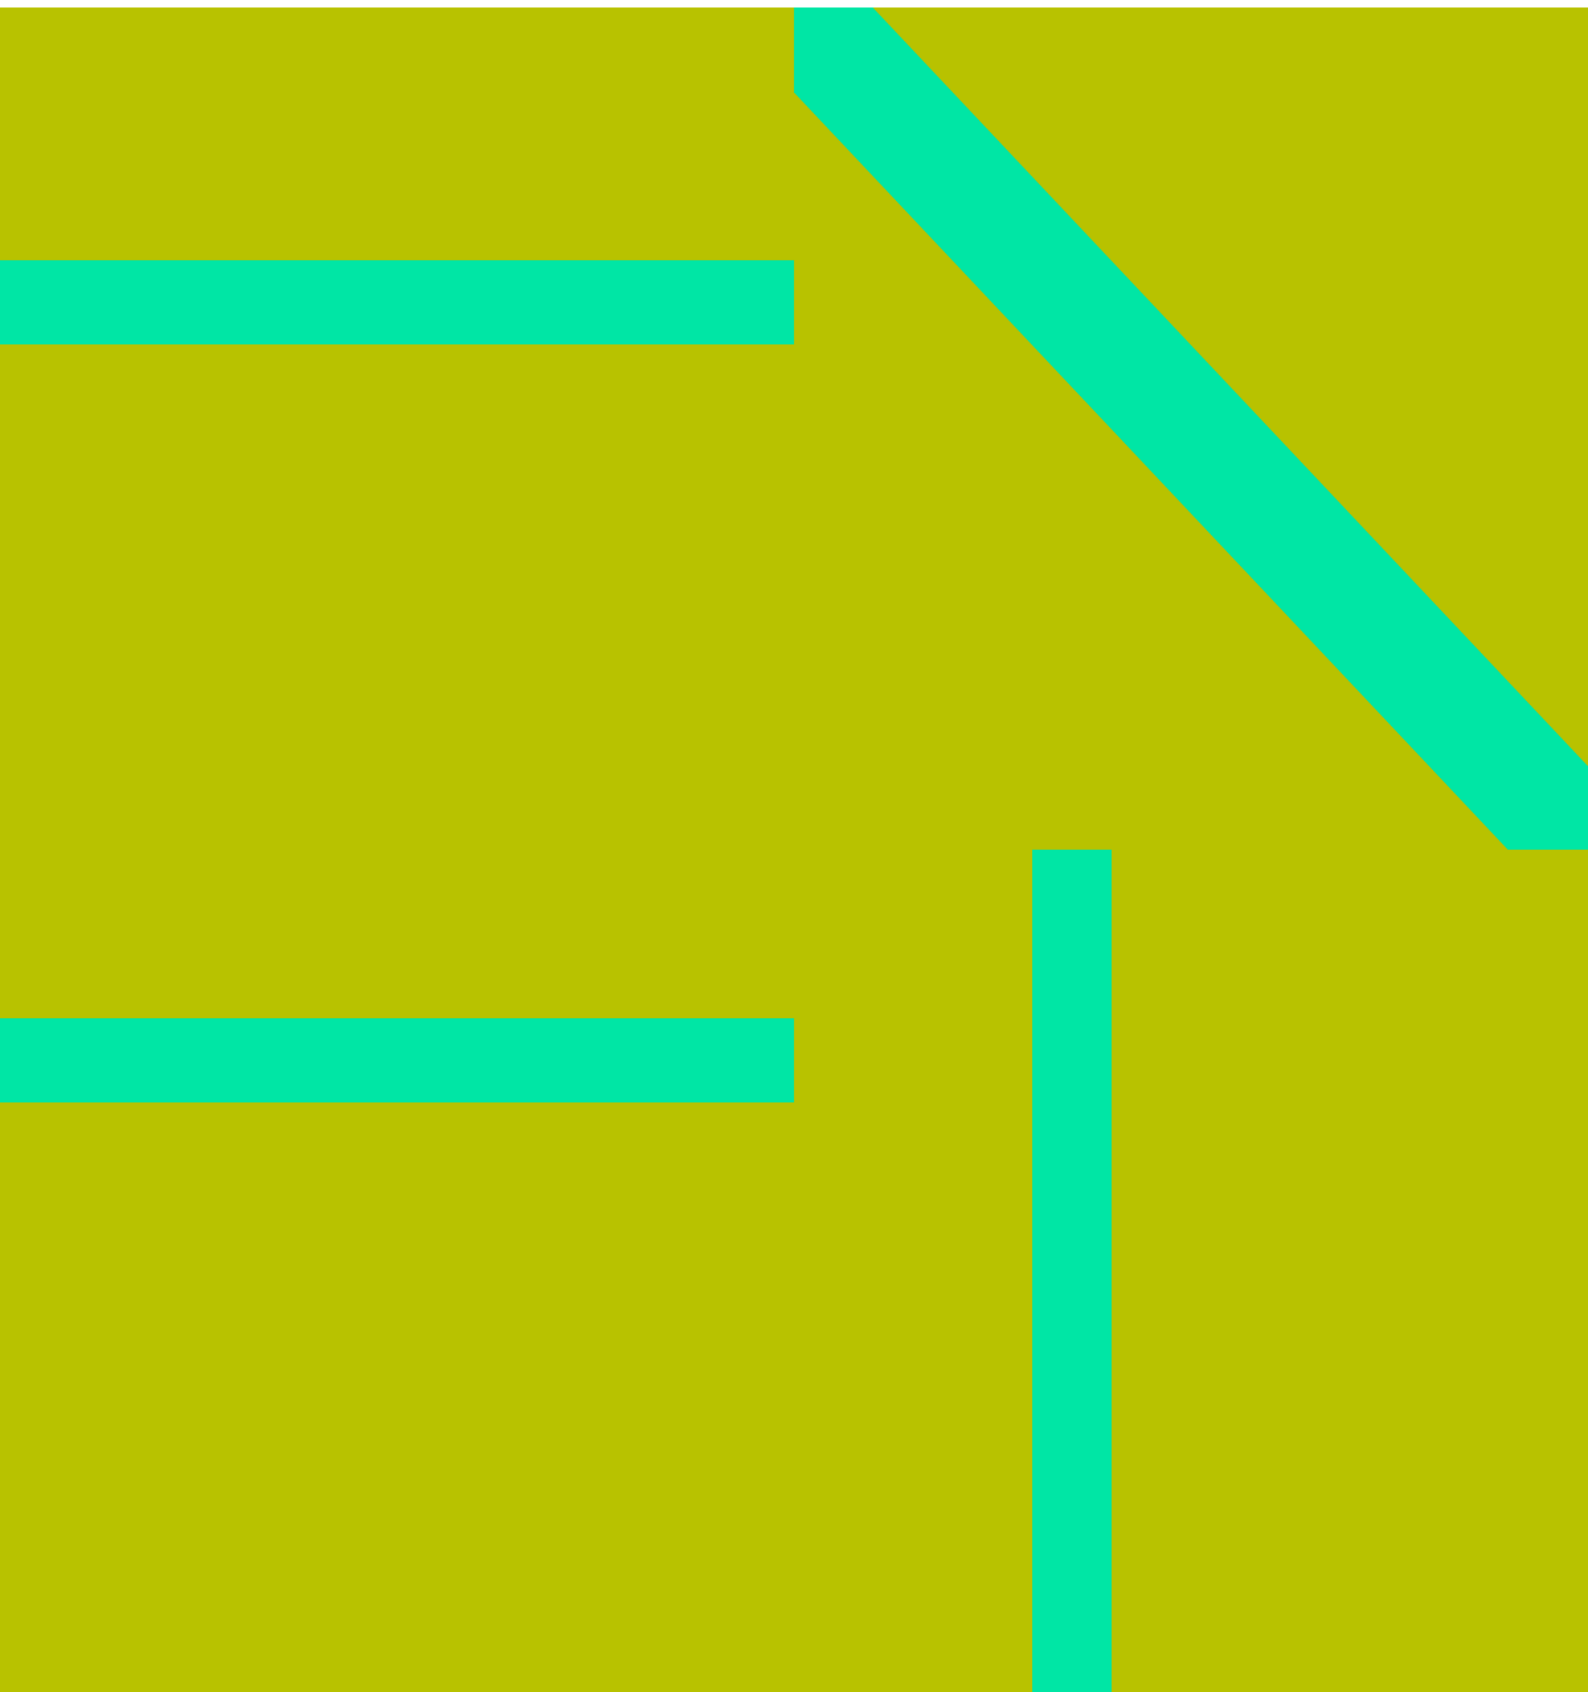


Table of Contents

- CMDB** 1
 - 理论* 1
 - iTop** 1
 - 链接 1
 - mgr 测试** 1
 - mysqldump 2

CMDB

- [InnodbCluster](#)

理论

1. bmc Step-by-Step guide to build a cmdb

打算自己开发自己的CMDB产品的话，个人建议可以参考以下的参考文档：

1. 必读的规范文档 [\[Configuration Management Database \(CMDB\) Federation Specification\]](#)
2. BMC系列的《BMC - Step-by-Step Guide to Building a CMDB
3. BMC的《BMCCMDBDataModelingGuide
4. HP的uCMDB技术白皮书

- CMDB调研报告：<https://www.cnblogs.com/hadex/p/8296738.html> - <https://www.dmtf.org/standards/cmdbf>

iTop

链接

- [对IT服务的管理改善计划：ITSM+ITIL v3\(西班牙语,包含iTop的一些用例\)](#)
- [iTop学习分享\(中文slide\)](#)

mgr 测试

case:

- 新建对象 未见异常
- 更新对象 未见异常
- 删除对象 未见异常
- 添加关联关系 未见异常
- 删除关联关系 未见异常
- 新建工单 未见异常
- 指派工单 未见异常
- 关闭工单 未见异常
- OQL查询 未见异常
- 备份 **Warning**
- 恢复备份 **失败**
- CSV导入 未见异常
- toolkit 未见异常
- 触发器 未见异常

cron

分别在 1,2 号节点部署 cron 任务，1号2号都可能有报错日志：

```
ERROR: 'Trying to commit transaction whereas none have been started !: mysql_errno = 3101,
mysql_error = Plugin instructed the server to rollback the current transaction.'
```

Please note, that in general this error is an expected behavior of Group Replication plugin, when it finds conflicting transactions on different nodes, if Multi Primary mode is used. Application should be able to handle this type of errors based on application logic. The following sections can only be applied in those cases, when this error is caused by multiple updates on the same node.

参考：https://support.oracle.com/knowledge/Oracle%20Database%20Products/2211042_1.html

可能最好只在一个节点上运行 cron

- 升级响应时间 Task:CheckStopWatchThresholds 正常
- 邮件发送，正常接收邮件，多节点跑cron未重复发送邮件。

mysqldump

全新安装，新增 4 个 Server 对象，一个 业务流程 对象

备份命令

```
mysqldump --opt --skip-lock-tables --default-character-set="utf8" --add-drop-database --single-transaction --host=localhost --port=3306 --user=root -proot --set-gtid-purged=OFF --result-file=/tmp/itop.sql cmdb
```

恢复命令

```
mysql -uroot -proot cmdb < itop.sql
```

结论：未发现异常

Printed on: 2024/05/04 15:50

Convert to img Failed!