

OpenID Connect

Subtitle

2022/10/05

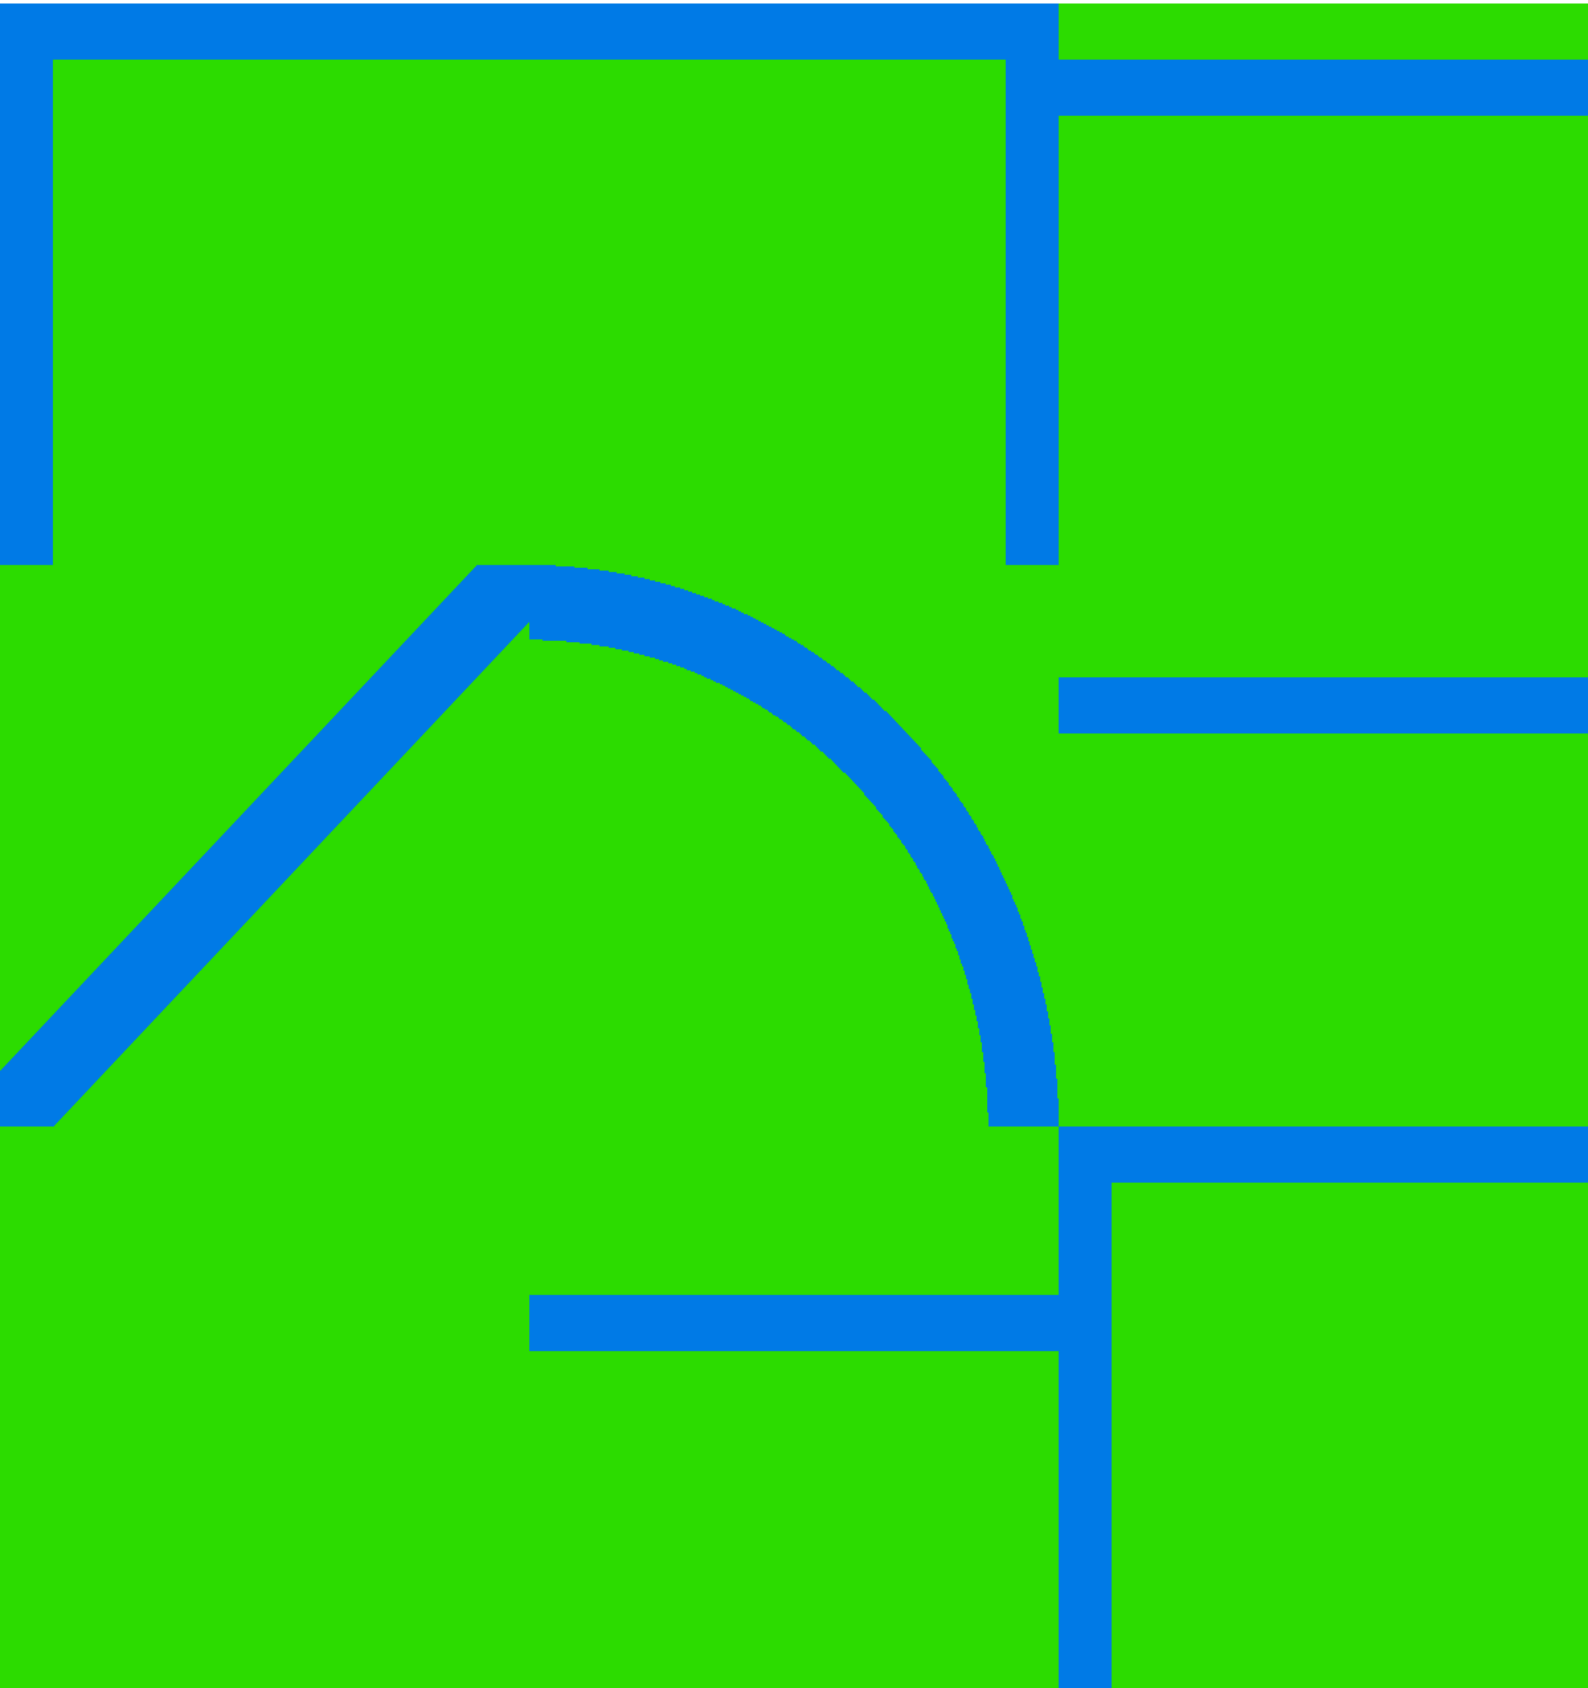


Table of Contents

- OpenID Connect 1
 - 添加自定义connector* 1
 - LoginURL 1
 - HandleCallback 1
 - Refresh 1
 - 自动grant access* 1

OpenID Connect

使用 [dex](#) 作为oidc provider

添加自定义connector

实现 LoginURL, HandleCallback 及 Refresh 三个函数即可

LoginURL

跳转到 idp 登录页面, 带上 dex 的 callback 地址及 state 参数

HandleCallback

处理 idp 回调URL, 返回 identity

Refresh

Refresh is implemented for backwards compatibility, even though it's a no-op.

自动 grant access

[snippet.yaml](#)

```
oauth2:  
  skipApprovalScreen: true
```

see: <https://github.com/dexidp/dex/issues/1172>

Printed on: 2022/10/05 17:59

Convert to img Failed!